

REPORT DOCUMENTATION PAGE					Form Approved OMB No. 0704-01-0188	
<p>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden to Department of Defense, Washington Headquarters Services Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</p> <p><b>PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.</b></p>						
1. REPORT DATE (DD-MM-YYYY)		2. REPORT TYPE		3. DATES COVERED (From - To)		
2003		Journal Article				
4. TITLE AND SUBTITLE				5a. CONTRACT NUMBER		
Surface diffusion enhanced chemical sensing by surface acoustic waves				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHORS				5d. PROJECT NUMBER		
Gabor Schmera <sup>a</sup>				5e. TASK NUMBER		
Laszlo B. Kish <sup>b</sup>				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)				8. PERFORMING ORGANIZATION REPORT NUMBER		
<sup>a</sup> SSC San Diego 53560 Hull St. San Diego, CA 92152-5001				<sup>b</sup> Texas A&M University Dept. of Electrical Engineering College Station, TX 77843-3128		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)		
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT						
Approved for public release; distribution is unlimited.						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT						
<p>A new chemical sensing method that enhances sensitivity and selectivity is proposed and verified by theoretical analysis. This method is based on the spectral analysis of the dynamics of adsorbed molecules on surface acoustic wave (SAW) delay lines and resonators. Various sources of noise, including diffusion and adsorption-desorption noise is considered.</p> <p>Published in <i>Sensors and Actuators B</i>, Elsevier Science, Volume 93, 2003, pp. 159-163.</p>						
15. SUBJECT TERMS						
Multiple gas sensing			Fluctuations			
Analysis of gas mixtures			Adsorption-desorption noise			
High sensitivity and selectivity						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON	
a. REPORT	b. ABSTRACT	c. THIS PAGE			Gabor Schmera, Code 2733	
U	U	U	UU	5	19b. TELEPHONE NUMBER (Include area code)	
					(619) 553-1107	



## Surface diffusion enhanced chemical sensing by surface acoustic waves

Gabor Schmera<sup>a,\*</sup>, Laszlo B. Kish<sup>b</sup>

<sup>a</sup>Signal Exploitation & Information Management, Space and Naval Warfare System Center, San Diego, CA 92152-5001, USA

<sup>b</sup>Department of Electrical Engineering, Texas A&M University, College Station, TX 77843-3128, USA

### Abstract

A new chemical sensing method that enhances sensitivity and selectivity is proposed and verified by theoretical analysis. This method is based on the spectral analysis of the dynamics of adsorbed molecules on surface acoustic wave (SAW) delay lines and resonators. Various sources of noise, including diffusion and adsorption–desorption noise is considered.

© 2003 Elsevier Science B.V. All rights reserved.

**Keywords:** Multiple gas sensing; Analysis of gas mixtures; High sensitivity and selectivity; Fluctuations; Adsorption–desorption noise

### 1. Introduction

In a recent paper [1], we have proposed a new way of processing the stochastic component of signals in chemical sensing surface acoustic wave (SAW) devices. The present conference paper is an expanded version of that theoretical study, where adsorption–desorption fluctuations have also been included.

Homeland defense, including anti-terrorist efforts, require highly selective, sensitive, and reliable detection of harmful agents. Intensive research has been going on to use chemical and biological sensor elements [1,2] to develop systems known as electronic noses, for gas and odor sensing, and electronic tongues, for fluid sensing.

Presently available electronic noses and tongues, mostly based on the measurement of conductance or electrochemical potential in surface-active devices, are neither reliable, nor sufficiently selective or highly sensitive [1,2]. The sensor components have a high false alarm rate, short lifetime, and they deteriorate relatively fast.

A more sensitive and reliable way of gas sensing is based on SAW devices [3–5]. In Fig. 1, the outline of a SAW delay line applied for gas sensing is shown, with the two electrode pairs A and B, and the adsorbed gas molecules. The extra inertial mass of the adsorbed molecules decreases the propagation velocity of the SAW, thus the delay time increase between A and B is approximately proportional to the

number of adsorbed molecules in the sensing zone (a.k.a. sweetspot) between the electrode pairs.

Fig. 2 shows the outline of a gas sensing SAW delay line in an oscillator based measurement circuit. The bandpass filter selects a single oscillatory mode and the oscillation frequency is measured by the frequency counter.

In SAW gas sensing devices, ppb gas concentration and nanogram adsorbed mass detection sensitivities have been demonstrated [3,4], and orders of magnitude greater sensitivity is predicted for oscillation frequency around GHz and higher. On the other hand, the selectivity of traditional SAW gas sensor devices is very poor; SAW sensors measure the total mass of the adsorbed gas molecules irrespectively of their kind. Selectivity can be somewhat improved by using appropriate sensing films.

In this paper, we propose a new way of SAW gas sensing. The new method is based on the spectral analysis of measured frequency fluctuations in the SAW device. This fluctuation-enhanced sensing is not only more sensitive than the classical methods but also, it gives quantitative information about the kind of adsorbed gases. Moreover, we demonstrate that the new method provides a quantitative analysis of the composition of a gas mixture even when using a single SAW device.

### 2. Diffusion noise

The gas molecules adsorbed on the surface execute a surface diffusion process, which is essentially a random walk over the entire surface of the SAW device. Assume that

\* Corresponding author.

E-mail addresses: [schmera@spawar.navy.mil](mailto:schmera@spawar.navy.mil) (G. Schmera), [laszlo.kish@cc.tamu.edu](mailto:laszlo.kish@cc.tamu.edu) (L.B. Kish).

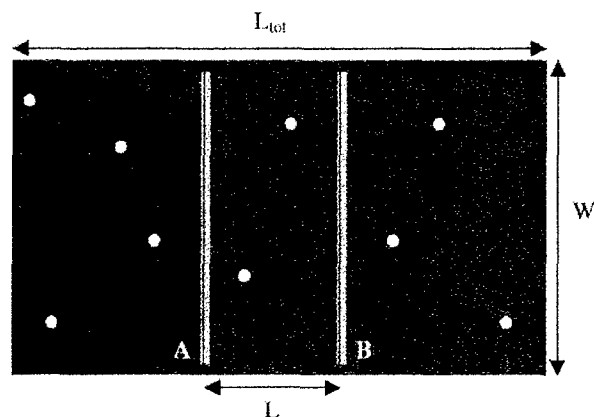


Fig. 1. The surface acoustic wave delay line with the electrodes and the adsorbed molecules [1]. The delay time increment between the two electrode pairs will be proportional to the number of adsorbed molecules in the sensing zone (a.k.a. sweetspot) between the electrodes. The part outside the sweetspot usually contains wave absorbent coating to avoid interference from the walls.

the SAW device has a thin, uniform coating over the whole surface so that the diffusion coefficient  $D$  of the adsorbed gas molecules is constant all along the surface, including the electrode range, see Fig. 1. Due to the independent random walking of each molecule, the instantaneous number  $N(t)$  of molecules over the sweetspot is fluctuating. Therefore, the SAW oscillator arrangement shown in Fig. 2 will have spontaneous fluctuations of the oscillation frequency  $f_{\text{osc}}$  and the instantaneous value  $\Delta f_{\text{osc}}(t)$  of the frequency deviation from the frequency of the gas molecule-free case will be proportional to  $N(t)$ . The dynamical properties of the fluctuation  $N(t)$  and the induced frequency fluctuations  $\Delta f_{\text{osc}}(t)$  will be determined by the value of  $D$  and the geometry of the SAW device and the sweetspot.

The low-frequency power density spectrum (noise spectrum)  $S$  of the ac component of  $\Delta f_{\text{osc}}(t)$  is described by the diffusion noise theory of MacFarlane [6] and Burgess [7] which, due to the linear coupling between  $N(t)$  and  $\Delta f_{\text{osc}}(t)$ , can directly be applied here [1]:

$$S(\omega) = N_{\text{tot}} \frac{KL^2}{D\Theta^3} [1 - (\cos \Theta + \sin \Theta) \exp(-\Theta)]^2, \quad (1)$$

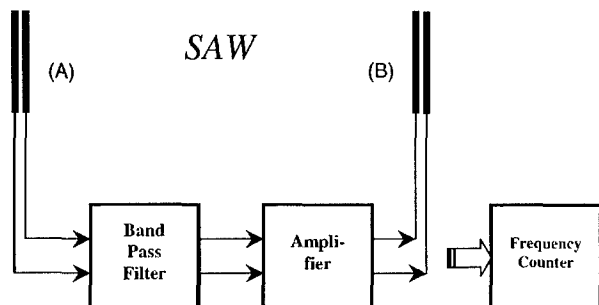


Fig. 2. Outline of a gas sensing SAW delay line in an oscillator based measurement circuit [1]. The bandpass filter selects a single oscillatory mode and the frequency is measured by the frequency counter.

where  $N_{\text{tot}}$  is the total number of gas molecules adsorbed on the surface,  $K$  a constant characterizing the time average  $\langle \Delta f_{\text{osc}}(t) \rangle_t^2$  of the frequency shift due to a single molecule, and  $L$  the length of the sweetspot, see Fig. 1:

$$\Theta = L \sqrt{\frac{\omega}{2D}}; \quad (2)$$

and the angular frequency  $\omega = 2\pi f$  [1].

Eq. (1) is valid only if the fluctuation has one-dimensional origin, which means that the width  $W$  and the length  $L$  of the sweetspot satisfy the following relations [1]:

$$L_{\text{tot}} \gg L \quad (3)$$

and

$$W \gg L, \quad (4)$$

where  $L_{\text{tot}}$  is the total length of the SAW device [1].

The interesting feature of Eq. (1) is that the spectrum has two different frequency regimes and, in both regimes, it follows a power-law scaling:

$$\begin{aligned} S(f) &\propto f^{-0.5} \quad (\text{for } \Theta \ll 1), \\ S(f) &\propto f^{-1.5} \quad (\text{for } \Theta \gg 1). \end{aligned} \quad (5)$$

The crossover frequency between the two regimes is given as [1]

$$\Theta = L \sqrt{\frac{\omega_c}{2D}} \cong 1, \quad \text{or} \quad f_c \cong \frac{1}{\pi} \frac{D}{L^2}. \quad (6)$$

From the theory of diffusive fluctuations, Eq. (1) and relation (5) is valid even if there is only a single molecule on the surface,  $N_{\text{tot}} = 1$ . On the other hand, when the surface contains several gas molecules with different diffusion coefficients, the total spectrum will be the sum of the corresponding spectra of the different gases:

$$S(f) = N_1 S(f, D_1) + N_2 S(f, D_2) + \dots \quad (7)$$

### 3. Fluctuation-enhanced sensing

Fluctuation-enhanced sensing means the statistical analysis of the dynamics of the measured frequency fluctuations of the SAW based oscillator device, see Fig. 3. In this paper, we make use of the power density spectrum  $S(f)$  of the ac component of the frequency fluctuations. The measured  $S(f)$  spectrum is described by Eqs. (1), (2) and (7), for the case when relations (3) and (4) hold. Relations (3) and (4) are easy to satisfy by the design of the geometry of SAW device. Using the measured  $S(f)$  implies strongly enhanced selectivity and sensitivity [1], as we will shown in the following paragraphs.

One of the factors contributing to increased sensitivity of fluctuation-enhanced sensing is the greatly reduced temperature dependence. The drift of the frequency  $f_{\text{osc}}$  due to temperature variations is the dominant limit of the resolution and accuracy of traditional SAW gas sensors [3,4].

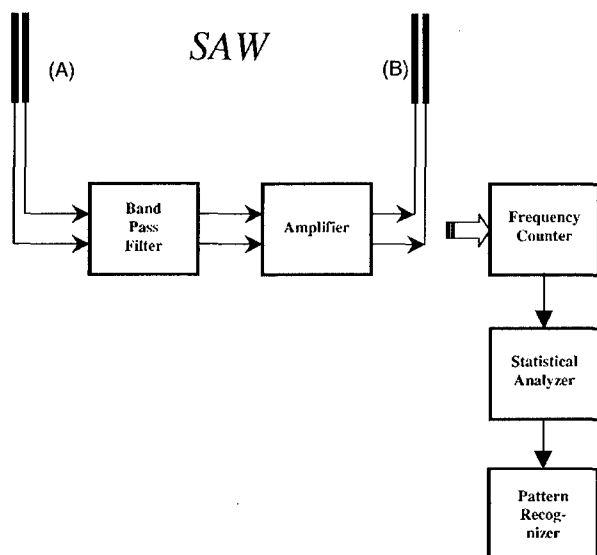


Fig. 3. Fluctuation-enhanced gas sensing [1]. The output of the frequency counter is fed into a statistical analyzer, which can be a spectrum analyzer or a more advanced instrument. It may measure other characteristics, such as amplitude distribution of the fluctuations. The pattern recognizer identifies the generated pattern.

In fluctuation-enhanced sensing we are interested in  $S(f)$  which is related to the ac component of the frequency fluctuations only, thus the temperature dependence, causing a slow dc drift, is significantly reduced [1].

Another important factor contributing to higher sensitivity is the fact that, due to the particular shape of the frequency spectra of diffusion processes, the diffusion noise

can be easily distinguished from other sensor noise processes, such as adsorption–desorption, and thermal noise [5]. Adsorption–desorption noise itself can be used to access chemical information, see following paragraphs.

The strongly enhanced selectivity stems from the fact that the  $S(f)$  is a pattern, not a single number. Therefore, not only the strength of  $S(f)$  has information about the adsorbed gas molecules but also its shape. While in the case of classical SAW gas sensing the only information we obtain is the total adsorbed gas mass, fluctuation-enhanced SAW sensing is able to analyze not only the total adsorbed gas mass but also the diffusion coefficients of the gas, for example by Eq. (6). In the case of a gas mixture, the composition of the mixture can be analyzed by using Eq. (7). In conclusion, a single sensor can be used as a complete electronic nose.

Fluctuation-enhanced gas sensing has the potential to replace more expensive analytical methods, such as gas chromatography, by this portable, less expensive way of sensing devices.

#### 4. Diffusive spectra and their combination

In this section, we demonstrate the efficiency of fluctuation-enhanced SAW sensing of gases. The demonstration is based on practical data and analytical calculations for the cases of single gas and a gas mixture.

Defect diffusion in the bulk of solids is a slow process and its activation energy is in the range of 0.1–1 eV. Surface diffusion processes are known to be much faster and their activation energy therefore much smaller.

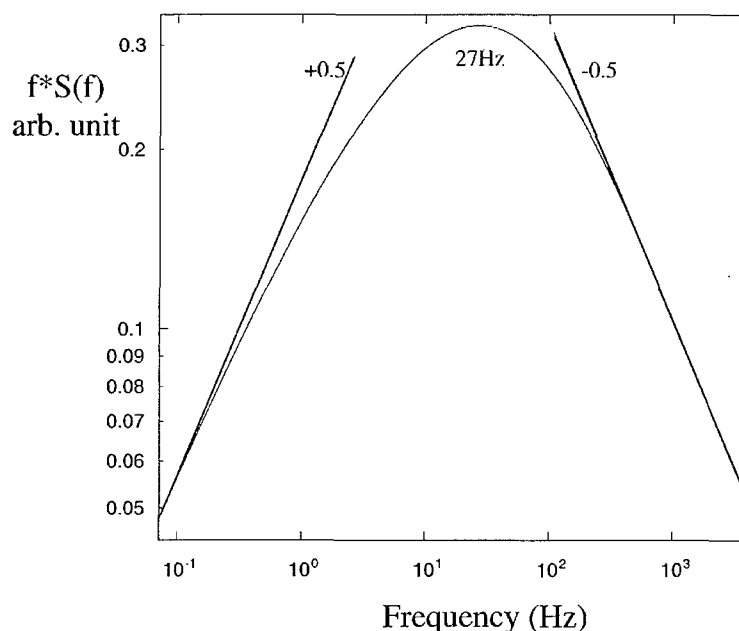


Fig. 4. Response in the case of a single agent [1], for  $L = 0.1$  mm,  $E = 0.1$  eV,  $d = 0.3$  nm,  $T = 400$  K,  $f_0 = 2 \times 10^{14}$ . The spectrum is multiplied by the frequency for the better visibility of the crossover point. The obtained curve, which is plotted on a log–log scale, converges to a slope of 0.5 in the low-frequency limit and  $-0.5$  in the high-frequency limit.

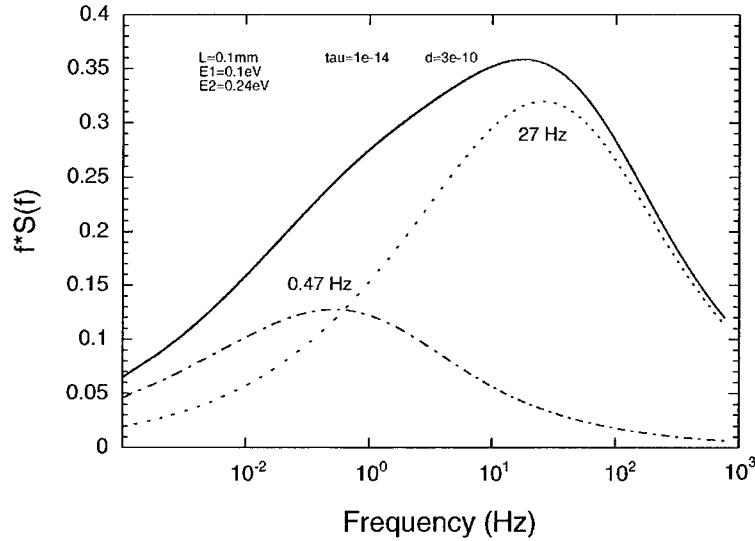


Fig. 5. Response in the case of two different agents with different diffusion activation energies [1].  $L = 0.1$  mm,  $E_1 = 0.1$  eV,  $E_2 = 0.245$  eV,  $d = 0.3$  nm,  $T = 400$  K,  $f_0 = 2 \times 10^{14}$ . The two dashed curves show the independent spectral contributions of individual agents. The measured (solid) curve is the sum of these curves. By using two-component analysis, and the known shape for a single agent, the curves can be reconstructed from the sum.

For the estimation of the diffusion coefficient, we used the following well-known equations:

$$D = d^2 f_s, \quad (8)$$

where  $d$  is the mean random walk step size (typically  $\approx$  the lattice constant) and  $f_s$  is the mean frequency of steps, which can be given as

$$f_s = f_0 \exp \left[ -\frac{E}{kT} \right], \quad (9)$$

where  $f_0$  is the mean attempt frequency,  $E$  the activation energy of surface diffusion,  $k$  the Boltzmann constant and  $T$  is the absolute temperature.

In Fig. 4, the  $f \times S(f)$  pattern is shown in the case of a single agent with activation energy  $E = 0.1$  eV, for sweet-spot length  $L = 0.1$  mm,  $d = 0.3$  nm,  $T = 400$  K and  $f_0 = 2 \times 10^{14}$ . The crossover frequency is at 27 Hz. From the measurement of this crossover frequency, the diffusion coefficient  $D$  of the gas can be determined so the gas can be identified. Note that the obtained curve, which is plotted on a log-log scale, converges to a slope of 0.5 in the low-frequency limit and  $-0.5$  in the high-frequency limit.

Fig. 5 shows the  $f \times S(f)$  pattern in the case of two different gases with different activation energies  $E_1 = 0.1$  eV,  $E_2 = 0.245$  eV, for  $L = 0.1$  mm,  $d = 0.3$  nm,  $T = 400$  K,  $f_0 = 2 \times 10^{14}$ . The two dashed curves show the independent spectral contribution of the different agents. The measured (solid) curve is the sum of these two curves. By using Eq. (7) and the known shape for a single agent, the dashed curves can be reconstructed by two-component analysis from the measured sum and the gases can be identified. After calibrating the sensor for different gases and gas concentrations, the dashed curves can be used for quantitative analysis of gas mixtures.

## 5. Adsorption-desorption noise

So far, we have assumed that the diffusion time  $\tau_L$  is much shorter than the characteristic adsorption-desorption time constant  $\tau_{ad}$ :

$$\frac{L^2}{D} = \tau_L \ll \tau_{ad} = \frac{\tau_a \tau_d}{\tau_a + \tau_d}, \quad (10)$$

where  $\tau_a$  and  $\tau_d$  are the adsorption and desorption time constants, respectively. The random nature of adsorption-desorption process is causing fluctuations of the mass of adsorbed vapor [5]. Then, the resulting power spectrum of fluctuations of SAW frequency have a Lorentzian spectrum:

$$S(f) \propto \frac{1}{1 + 4\pi^2 f^2 \tau_{ad}^2}. \quad (11)$$

This fluctuation is invisible if condition (10) holds. However, in the opposite case:

$$\frac{L^2}{D} = \tau_L \gg \tau_{ad} = \frac{\tau_a \tau_d}{\tau_a + \tau_d}, \quad (12)$$

the fluctuation spectrum given by Eq. (11) will dominate. As  $\tau_{ad}$  is characteristic of the bounding interaction between agent and the surface, the measured spectrum (11) can also be used to identify various agents using the same technique described in the previous section.

## 6. Conclusion

We introduced fluctuation-enhanced gas sensing by SAW devices and demonstrated its superior sensitivity

and selectivity for the detection and identification of gases and quantitative analysis of gas mixtures.

### Acknowledgements

We thank John Audia for valuable comments and support. This work was supported by the Space and Naval Warfare Systems Center, San Diego and the Department of Electrical Engineering, Texas A&M University. This paper includes material that may be subject to a government-owned patent application.

### References

- [1] G. Schmera, L.B. Kish, Fluctuation-enhanced gas sensing by surface acoustic wave devices, *Fluctuat. Noise Lett.* 2 (2002) L117–L123.
- [2] M.A. McCraven, J.W. Gardner, P.N. Bartlett, Electronic noses—development and future prospects, *Trac-Trends IN Anal. Chem.* 15 (1996) 486–493.
- [3] A. Bryant, M. Poirier, D.L. Lee, J.F. Vetelino, A surface acoustic wave gas detector, in: *Proceedings of the 36th Annual Frequency Control Symposium*, 1982, pp. 276–283.
- [4] G. Watson, E. Staples, SAW resonators as vapor sensors, in: *Proceedings of the IEEE 1990 Ultrasonic Symposium*, IEEE, 1990, pp. 311–314.
- [5] J.R. Vig, Y. Kim, Noise in microelectromechanical system resonators, *IEEE Trans. Ultrason. Ferroelectr. Freq. Contr.* 46 (1999) 1558–1565.
- [6] G.G. MacFarlane, *Proc. Phys. Soc.* 59 (1950) 366;  
G.G. MacFarlane, Theory of contact noise in semiconductors, *Proc. Phys. Soc. B* 63 (1950) 807–814.
- [7] R.E. Burgess, Contact noise in semiconductors, *Proc. Phys. Soc. B* 66 (1953) 334–335.

### Biographies

*Laszlo B. Kish* (until 1999: Kiss), is a tenured associate professor at the Department of Electrical Engineering, Texas A&M University, College Station. His fields of interest include fluctuation and noise processes, nanoelectronics, nanophysics, chemical sensing, quantum computing and nonlinear signal systems. He is the editor-in-chief of *Fluctuation and Noise Letters* and editorial board member at the *Journal of Nanoscience and Nanotechnology*.

*Gabor Schmera* works as a scientist at the Space and Naval Warfare Systems Center, San Diego, CA. His current fields of interest include stochastic and chaotic systems, Monte Carlo simulations and applications to chemical sensing and signal processing.